

LIVE FIBER IDENTIFIER/
TONE GENERATOR

LFD-300/TG-300 FiberFinder™

NETWORK TESTING – OPTICAL

A triple test tool—live fiber identifier, live fiber detector, dark fiber identifier—for truly efficient fiber management

- Pinpoints a specific live fiber using EXFO's FiberFinder™ functionality
- Induces minimal loss: ≤ 1 dB for any fiber and at any wavelength
- Locates a particular dark fiber using tone recognition (270 Hz, 1 kHz, 2 kHz)
- Measures the power transmitted on the fiber

FiberFinder™

EXFO

EXPERTISE REACHING OUT

Pinpointing Live and Dark Fibers: Guesswork Ends Here

Performing network upgrade or optical testing requires a fiber to be disconnected. This is often easier said than done, since finding the right connection can be tricky, namely because of fiber mislabelling or poor record keeping. While the dark fiber can be identified using a tone generator (270 Hz, 1 kHz, 2 kHz), the live fiber identification “technique” often involves one technician pulling one end of the patchcord, with another technician trying to identify which patchcord is moving at the other end—a process that translates into long delays and can result in unnecessary service disruption.

Combined with the TG-300 Tone Generator, the innovative LFD-300 FiberFinder™ Live Fiber Identifier* enables technicians to identify a specific live fiber without having to disconnect it and, above all, without having to guess.

This brings key benefits:

- No more network outages as a result of fiber detection/identification procedures
- The minimized need to access the network helps prevent errors

EXFO's LFD-300 FiberFinder: A Uniquely Designed Live Fiber Identifier

For all fiber types and all wavelengths, insertion loss is a function of the bending angle (see figure 1). Although the angles differ, the behaviour remains the same.

The LFD-300 FiberFinder brings a unique approach: the power loss is monitored as the angle is changed. Therefore, the angle is automatically optimized for each fiber type and each wavelength. This results in clear-cut advantages:

- Maximum loss of 1 dB guaranteed for any singlemode fiber (except certain dark-coated fibers) and any wavelength
- No damage to the fiber: bending is always minimal, and the fiber is released when no power is detected
- 100% reliability on traffic detection, direction identification and tone detection
- In-line, non-disruptive power measurements
- Safe to be used in long-haul applications and on high-payload fibers—contrary to traditional live fiber detectors
- Recommended for 900 μ m, 1.6 mm and 3 mm fibers; no need to replace the headpiece

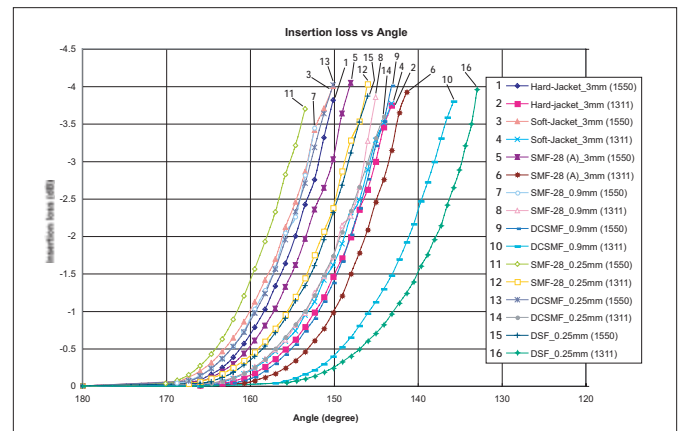


Figure 1: By monitoring the loss, the LFD-300 can stop bending the fiber when sufficient light is ejected and thus control the loss

Ambient Light Offset

EXFO's LFD-300 performs an ambient light offset prior to fiber bending, which makes it less sensitive to ambient light. An external cap can also be placed on the head-end to block intense ambient light.

* Technology and applications protected by PCT published patent appl. WO/2006/092051, PCT published patent appl. WO/2005/020478 and associated national entries in the USA and other countries.

Industry First: the FiberFinder Functionality



Figure 2: pinpointing a specific live fiber can be puzzling without the right tool.

For detecting dark/live fibers or identifying a particular dark fiber using a pulse light (270 Hz, 1kHz, 2kHz), traditional LFD functionalities do the trick. However, they cannot pinpoint a specific live fiber—especially with doubtful labeling and poor record-keeping—and help you ensure you disconnect the right one.

In addition, disconnecting the wrong fiber causes downtime, a costly consequence that can easily be avoided. For instance, at US\$10,000 per hour and per wavelength, downtime can cost up to US\$160,000 per hour for a 16-channel 10 Gb/s WDM system.

Combined with the TG-300, a non-intrusive, non-disruptive clip-on signature generator that is based on FiberFinder technology, EXFO's LFD-300 addresses this need with guaranteed low loss. Installed at the transmitter site, the TG-300 adds a typical 0.2 dB signature to the live signal by applying a soft low-frequency modulation pressure to the fiber. This signature is then detected at the other end by the LFD-300, in mere seconds.

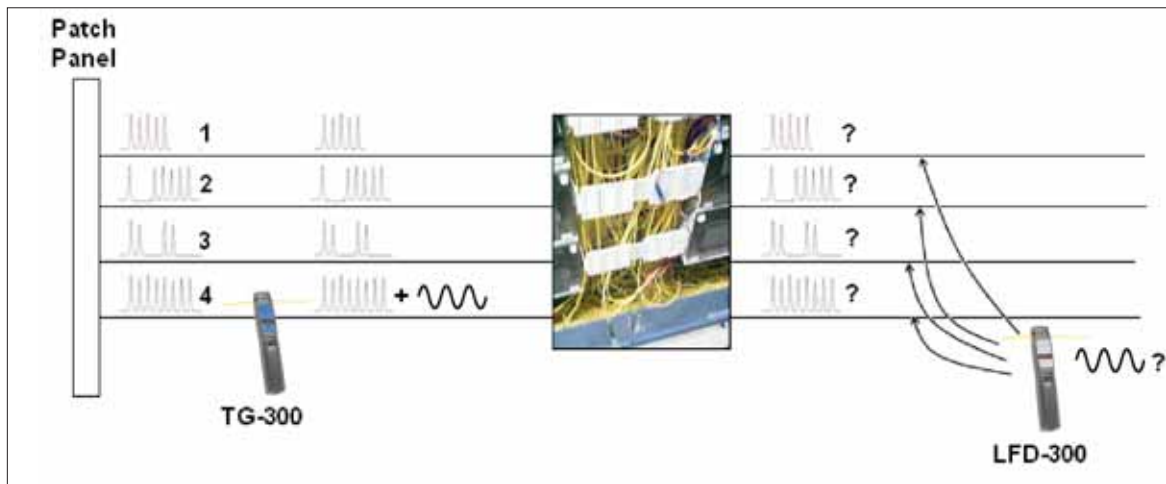


Figure 3: Impossible until now, locating a specific live fiber is now an easy task with the FiberFinder.



EXFO offers a flexible clip-on arm to enable single-person use of the LFD-300 and TG-300 combo.

SPECIFICATIONS (PRELIMINARY) ^a

Fiber type		3 mm, 1.6 mm, 900 μm ^b
Insertion loss (dB)	Maximum guaranteed	1 ^c
	1550 nm	0.6
	1310 nm	0.4
Power range (dBm)	TG-300	25 to -30
	LFD-300	25 to -30
Power measurement uncertainty (dB)		± 1.5
Test time (s)		<20

General Specifications

Temperature	operating	0 °C to 50 °C	(32 °F to 122 °F)
	storage	-40 °C to 70 °C	(-40 °F to 158 °F)
Relative humidity	0 % to 93 % non-condensing		

Ordering Information

TK-FF: FiberFinder kit, including one TG-300, one LFD-300, soft carrying bag, AC adapter and clamp to hold the TG-300 for single-person operation.

Notes:

- All specifications are typical and at 1550 nm unless otherwise specified.
- Typical fibers, clean and undamaged. Coating/jacket color may alter the specifications. For G.652 fiber type. Specifications may vary with other fiber types.
- For specified fiber types, with power in fiber greater than -25 dBm.

ORDERING INFORMATION

LFD-300

Model
LFD-300

Example: LFD-300

TG-300

Model
TG-300

Example: TG-300

Rugged Handheld Solutions

<p>OPTICAL</p> <ul style="list-style-type: none"> - OTDRs - OLTSs - Power meters - Light sources - Talk sets 	<p>COPPER ACCESS</p> <ul style="list-style-type: none"> - ADSL/ADSL2+, SHDSL, VDSL test sets - VoIP and IPTV test sets - Ethernet test sets - POTS test sets
--	---

Platform-Based Solutions

<p>OPTICAL FIBER</p> <ul style="list-style-type: none"> - OTDRs - OLTSs - ORL meters - Variable attenuators 	<p>DWDM TEST SYSTEMS</p> <ul style="list-style-type: none"> - OSAs - PMD analyzers - Chromatic dispersion analyzer 	<p>TRANSPORT AND DATA COM</p> <ul style="list-style-type: none"> - Next Generation SONET/SDH and OTN testers - SONET/DSn (DS0 to OC-192) testers - SDH/PDH (64 kb/s to STM-64) testers - T1/T3, E1 testers - 10/100M and Gigabit Ethernet testers - Fibre Channel testers - 10 Gigabit Ethernet testers
--	--	---



根网通讯设备(北京)有限公司
 邮件: enquiry@rootscomm.com.cn
 网址: www.rootscomm.com.cn
 ROOTS Communication Equipment (Beijing) Co.,Ltd.
 北京市朝阳区芳园西路5号 丽园中心508室 100015
 电话: +86-10-64382686
 传真: +86-10-64382703



Printed in Canada 06/09